



## Compact AC Power Supply PCR-M Series

Compact AC power supply using the PWM inverter method

Output capacity: 500 VA, 1,000 VA and 2,000VA (single phase)

AC output: 1 V to 135 V/2 V to 270 V at 40 Hz to 500 Hz

DC output:  $\pm 1.4$  V to 190 V/ $\pm 2.8$  V to 380 V

The maximum peak current triples the rated current (RMS value).

Equipped with measurement functions and various communication interface options.



# Introducing a Compact AC Power Supply . . . . . That is Ready to Use

The PCR-M series is a small-size AC power supply with the ease of a variable auto transformer or an automatic voltage regulator (AVR) and the usefulness of a multifunctional AC power supply. As the PWM inverter method is adopted for the power unit, the PCR-M series is much smaller and lighter than the predecessors while enabling high-quality and highly-efficient (about 70%) operation. This power supply comes with measurement features, memory feature, protection functions and various communication interface options, and it is even possible to provide DC power. When you incorporate an optional analog interface board (EX04-PCR-M), the PCR-M series can also be used as a booster for arbitrary signal generator. This small and versatile unit can provide you with more work styles than you can imagine. You can't do without it once you use it!



## Compact design

Small enough to fit on your work desk!  
Only 214W × 124H × 350D mm!  
Weighs only 6 kg and easy to carry! (PCR500M)



Neatly fits on your desk!  
(Picture) Left: PCR500M Right: Electronic Load PLZ164W



Easy remote control with attached software!



Small and light. Only **6 kg**  
(PCR500M)

Easy to carry with  
only one hand



## Versatile output modes

Three modes (AC, DC, AC+DC) are available.\*1  
The frequency range is up to 500 Hz.

## Memory function

You can store and recall three combinations of settings for voltage, frequency and limits for the output on the main unit. By calling the memory during output, you can test the sudden changes of voltage or frequency.\*2

## Measurement functions

You can measure the voltage, current and power of AC and DC output, apparent power, reactive power, power factor, crest factor and current peak hold.\*3

## Various communication interface options

RS-232C is provided as standard.  
GPIB and USB are optional.

## Analog interface

By incorporating an optional analog interface (EX04-PCR-M), output can be controlled by using external analog signals. Input DC signals can be used to change output AC voltage and boost input waveform.

# PCR-M series

## Compact AC Power Supply

\*1 You can access AC+DC mode if you have installed an optional interface board of IB21, US21 or EX04-PCR-M. The communications interface is used to set that mode.

\*2 An installed appropriate optional interface board allows up to ten combinations of settings to be stored in the memory. The communications interface is also used to set or call extended memory addresses (4 to 10).


\*3 You can use the communications interface to measure apparent power (VA), reactive power (VAR), power factor (PF), crest factor (CF), and peak hold current.

## Compact design

The PCR-M series is characterized by much smaller size and lighter weight in comparison with the ac power supply based on the linear amplifier. For example, the very compact PCR-M series is reduced by a factor of 5 in terms of the volume and by a factor of about 4 in terms of the weight (in comparison with our past product). You can readily handle this product on your desk and easily carry it.

## Output characteristics: AC mode

The output voltage varies from 1 V to 135 V or 2 V to 270 V (two ranges). You can switch ranges manually or automatically. The peak current can triple the maximum rated current for the rectifier load of the capacitor input type. The frequency varies from 40 Hz to 500 Hz, which is why the PCR500M is suitable as a power supply for aircrafts and ships that require 400 Hz and for driving actuators that require 250 Hz.



High-quality output waveform (distortion rate of output waveform is 0.5% or less)

## Output characteristics: DC mode\*1

The output voltage varies from  $\pm 1.4$  V to 190 V or  $\pm 2.8$  V to 380 V (two ranges). You can switch ranges manually or automatically. The maximum instantaneous current is up to three times higher than the maximum rated current. When an optional interface board is installed, the direct current can be superposed on the alternating current (AD + DC mode)

## Input characteristics

The input voltage is from 100 V AC to 120 V AC or 200 V AC to 240 V AC at 50 Hz/60 Hz (single phase). The voltage is automatically determined when the power supply is turned on. The active filter enables the power factor to be 0.9 (TYP value) to reduce the input current and the harmonic current.

## Measurement functions\*3

The PCR-M series can measure the voltage, current, and power of AC and DC output. The device can display the true RMS and the average (DC) values for the output voltage, and the true RMS, peak and the average (DC) values for the output current. When a communication interface is used, the PCR-M series can measure the apparent power (VA), the reactive power (VAR), the power factor (PF), the crest factor (CF), and the peak hold current.


## Protection

The following protection features are available:

- Protection against non-rated input voltage
- Protection against overheat (OHP)
- Protection against overload:
  - Current limit (OCP)/monitoring for exceeded power (OPP)/monitoring for exceeded peak current
- Detection of voltage abnormalities:
  - Increased voltage (OVP)/decreased voltage (LVP)


## Output on phase angle

The output on phase angle can be set at AC mode. The output off phase angle is turned off at a zero cross phase.

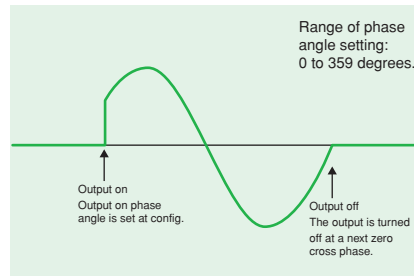

## Memory function\*2

The PCR-M series can store three sets of setting value for output voltage and frequency, and limit value. By manually changing the preset memory during output, the test for sudden changes of voltage and frequency is also possible. When an optional interface board (IB21, US21 or EX04-PCR-M) is installed, the memory can store up to 10 settings.

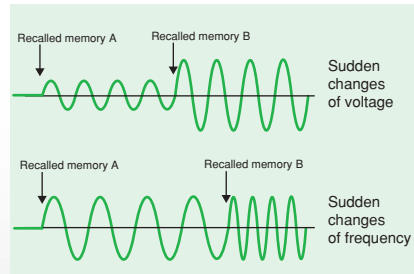


## Analog interface

By using an optional analog interface board (EX04-PCR-M), you can control the output by external analog signals.

### EXT-AC mode


The voltage of the output alternating current can be changed based on the level input DC signal.

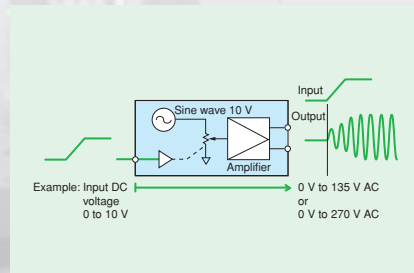

Voltage amplification rate: 13.5-times or 27-times

### EXT-DC mode


The input waveform is directly amplified and output.

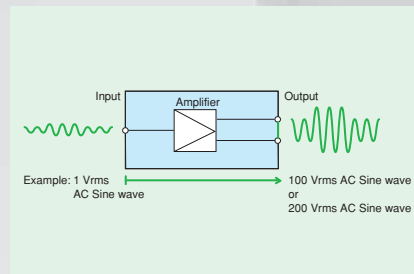

Voltage amplification rate: 100-times or 200-times

## Control using a PC

You can control the PCR-M series through the standard RS-232C interface, the optional GPIB interface, or the optional USB interface.\* By using the control software (Easy Controller for PCR-M series) which comes with the PCR-M series, you can easily set the parameters of the PCR-M series and log the output measured values.

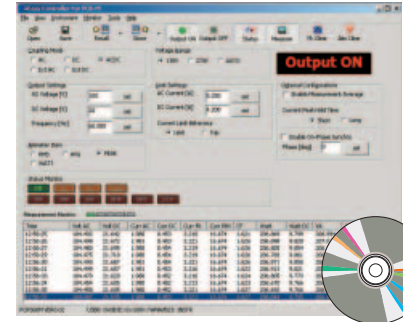

### Operating environment for Easy Controller for PCR-M


- OS: Windows XP/2000/Me/98
- CPU: Pentium 233 MHz or greater
- Memory: At least 128 MB
- Driver: VISA library supporting VISA COM
- Interface: RS-232C, GPIB, or USB
- \* Instrument drivers for Microsoft Visual Basic, Microsoft Office VBA, Microsoft Visual C++, LabVIEW, or LabWindows/CVI are also included in the disc.

## Options

GPIB interface board: IB21

USB interface board: US21

Analog interface board: EX04-PCR-M

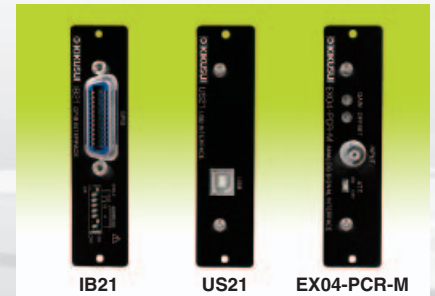

Note: Only one interface board can be installed.

### Rack mount adapters


For the PCR500M

- KRA150 (for millimeter specifications)
- KRA3 (for inch specifications)

For the PCR1000M and PCR2000M

- KRB150-TOS (for millimeter specifications)
- KRB3-TOS (for inch specifications)

### ●Rear panel

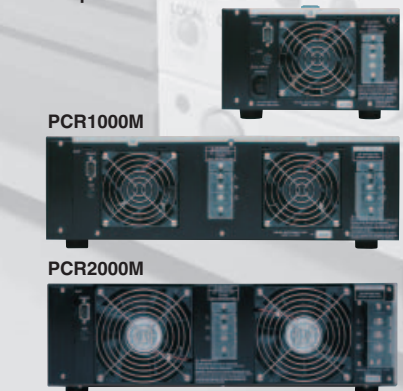

# Specifications

## ■ Specifications of the main unit

Note: "TYP value" indicates a typical value and does not guarantee the performance. "rdng" indicates a reading on the device.

	PCR500M	PCR1000M	PCR2000M
<b>Input voltage</b>	Nominal rated input: 100 to 120 V AC/200 to 240 V AC, 50/60 Hz, single phase Input voltage range: 90 to 132 V AC/180 to 250 V AC (automatically determined when the power is turned on), 47 to 63 Hz, single phase		
<b>Input current</b>	Up to 9 A/4.5 A	Up to 18 A/9 A	Up to 36A/18 A
<b>Input power factor*</b>	0.9 (TYP value)		
<b>Efficiency</b>	At least 70%		
<b>Output voltage</b>	1 to 135 V AC/2 to 270 V AC (135 V/270 V range) 1.4 to 190 V DC/2.8 to 380 V DC (135 V/270 V range)		
<b>Setting Resolution</b>	0.1 V		
<b>Output capacity</b>	AC mode: 500 VA at maximum DC mode: 400 W at maximum	AC mode: 1000 VA at maximum DC mode: 800 W at maximum	AC mode: 2000 VA at maximum DC mode: 1600 W at maximum
<b>Maximum current</b>	AC mode: 5 A/2.5 A* <sup>2</sup> DC mode: 4 A/2 A* <sup>3</sup>	AC mode: 10 A/5 A* <sup>2</sup> DC mode: 8 A/4 A* <sup>3</sup>	AC mode: 20 A/10 A* <sup>2</sup> DC mode: 16 A/8 A* <sup>3</sup>
<b>Output frequency</b>	Range: 40 to 500 Hz, setting: 0.1 Hz, accuracy: $\pm 2 \times 10^{-4}$		
<b>Output waveform distortion ratio</b>	0.5% or less (at 50 V to 135 V/100 V to 270V at load power factor 1)		
<b>Accuracy of voltmeter</b>	$\pm(0.5\% \text{ of rdng} + 0.3 \text{ V}/0.6 \text{ V})$ (Output voltage greater than 13.5 V/27 V and output frequency 45 Hz to 65 Hz/DC at $23 \pm 5^\circ\text{C}$ )		
<b>Accuracy of ammeter (RMS)</b>	$\pm(0.5\% \text{ of rdng} + 0.02 \text{ A}/0.01 \text{ A})$   $\pm(0.5\% \text{ of rdng} + 0.04 \text{ A}/0.02 \text{ A})$   $\pm(0.5\% \text{ of rdng} + 0.08 \text{ A}/0.04 \text{ A})$ (5% to 100% of the maximum output current and output frequency 45 Hz to 65 Hz or DC at $23 \pm 5^\circ\text{C}$ )		
<b>Dimensions (maximum)</b>	214W x 124 (150)H x 350 (395)D mm	429 (450)W x 128 (150)H x 350 (400)D mm	429 (450)W x 128 (150)H x 450 (500)D mm
<b>Weight</b>	Approximately 6 kg	Approximately 11 kg	Approximately 15 kg
<b>Operating temperature and humidity range</b>	0 to 40°C, 20%rh to 80%rh (non-condensing)		
<b>Storage temperature and humidity range</b>	-10°C to 60°C, 90%rh or less (non-condensing)		

\*1 When the output voltage is 100 V/200 V (in the 135 V/270 V range), the current is maximum, and the load power factor is 1.

\*2 When the output voltage is 1 V to 100 V/2 V to 200 V. Depends on the power capacity when the output voltage is 100 V to 135 V/200 V to 270 V.

\*3 When the output voltage is 1.4 V to 100 V/2.8 V to 200 V. Depends on the power capacity when the output voltage is 100 V to 190 V/200 V to 380 V.

## ■ Specifications of the communication interface

<b>RS-232C</b>	Conforms to EIA232D specifications. D-SUB9 pin connector. Baud rate: 1200, 2400, 4800, 9600, 19200 bps Data length: 8 bits, stop bit: 1 bit, no parity bit, X-Flow control
<b> GPIB (IB21: optional)</b>	Conforms to IEEE STD.488.1-1978 specifications. SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, DT1, C0, E1
<b>USB (US21: optional)</b>	Conforms to USB 2.0 specifications. Conforms to USBTMC-USB488 device class specifications. Communication speed: 12 Mbps (full speed)
<b>Common</b>	Software protocol: IEEE 488.2 STD 1992 Command language: SCPI Specification 1999.0

## ■ Analog interface specifications (EX04-PCR-M: optional)



<b>Input terminal</b>	<b>Maximum allowable input voltage</b>	$\pm 15 \text{ V}$	
	<b>Type</b>	BNC	
	<b>Input impedance</b>	$10 \text{ k}\Omega \pm 5\%$ (not unbalanced)	
	<b>Isolation voltage</b>	$\pm 100 \text{ Vmax}$	
<b>EXT-AC mode*<sup>1</sup></b>	<b>Input voltage range</b>	0 V to $\pm 10 \text{ V}$ (DC)	
	<b>Voltage amplification rate (135 V/270 V range)</b>	13.5 times or 27 times	
	<b>Frequency setting range</b>	40 Hz to 500 Hz	
<b>EXT-DC mode</b>	<b>Input voltage range</b>	ATT off	0 V to $\pm 1.90 \text{ Vpeak}$ (0 to 1.35 Vrms sine wave)
		ATT on	0 V to $\pm 10 \text{ V}$ (DC)
	<b>Input frequency range</b>	ATT off* <sup>2</sup>	40 Hz to 500 Hz (sine wave) /40 Hz to 100 Hz (square wave) /DC
	<b>Frequency characteristics</b>	ATT off	-0.3 dB at 500 Hz with respect to 55 Hz (typical value)
	<b>Voltage amplification rate (135 V/270 V range)</b>	ATT off	100 times or 200 times
ATT on		19 times or 38 times	
<b>Output voltage distortion ratio*<sup>3</sup></b>	Main unit specifications + 0.5% or less		

\*1 ATT is always set to on.



\*2 Measurable range for voltage, current and power is DC and from 40 Hz to 500 Hz. The frequency is set based on the input waveform cycle.

\*3 In the EXT-AC mode, when direct current is input. In the EXT-DC mode, when a sine wave with 0.1% or less distortion rate is input.



## ■ Dimensions (units: mm)



PCR500M

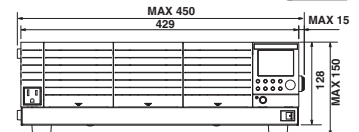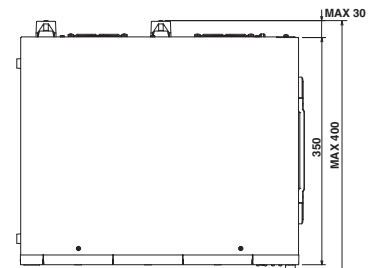

PCR1000M

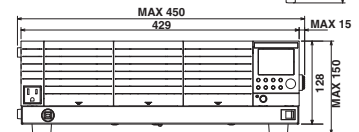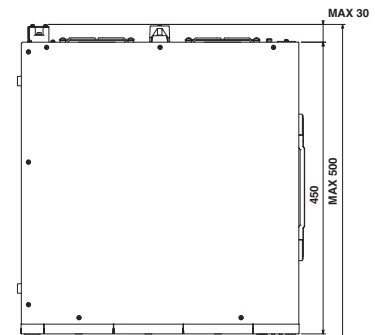

PCR2000M

## ■ Distributor:



### KIKUSUI ELECTRONICS CORPORATION

1-1-3, Higashiyamata, Tsuzuki-ku, Yokohama, 224-0023, Japan

Phone: (+81) 45-593-7570, Facsimile: (+81) 45-593-7571, www.kikusui.co.jp

**KIKUSUI AMERICA, INC. 1-877-876-2807 www.kikusuiamerica.com**



530 Lakeside Drive, Suite#180, Sunnyvale, CA 94085, U.S.A.  
Phone: 408-733-3432 Facsimile: 408-733-1814

**KIKUSUI TRADING (SHANGHAI) Co., Ltd. www.kikusui.cn**



Room, D-01, 11F, Majesty Bld, No.138, Pudong Ave, Shanghai City  
Phone: 021-5887-9067 Facsimile: 021-5887-9069

For our local sales distributors and representatives, please refer to "sales network" of our website.

■ All products contained in this catalogue are equipment and devices that are premised on use under the supervision of qualified personnel, and are not designed or produced for home-use or use by general consumers. ■ Specifications, design and so forth are subject to change without prior notice to improve the quality. ■ Product names and prices are subject to change and production may be discontinued when necessary. ■ Product names, company names and brand names contained in this catalogue represent the respective registered trade name or trade mark. ■ Colors, textures and so forth of photographs shown in this catalogue may differ from actual products due to a limited fidelity in printing. ■ Although every effort has been made to provide the information as accurate as possible for this catalogue, certain details have unavoidably been omitted due to limitations in space. ■ If you find any misprints or errors in this catalogue, it would be appreciated if you would inform us. ■ Please contact our distributors to confirm specifications, price, accessories or anything that may be unclear when placing an order or concluding a purchasing agreement.